


HiPro Series

STP330S - A60/Wfh

120-CELL HALF CUT MONOCRYSTALLINE
SOLAR MODULE

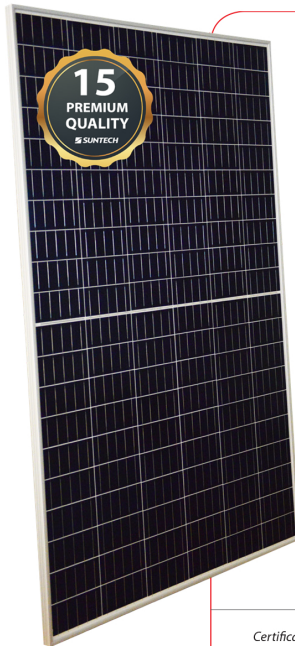

Features



High power output

Compared to normal module, the power output can increase 5W-10W



High PID resistant

Advanced cell technology and qualified materials lead to high resistance to PID



Excellent weak light performance

More power output in weak light condition, such as haze, cloudy, and morning



Lower operating temperature

Lower operating temperature and temperature coefficient increases the power output



Extended load tests

Module certified to withstand front side maximum static test load (5400 Pascal) and rear side maximum static test loads (3800 Pascal) *



Withstanding harsh environment

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline

Certifications and standards:
IEC 61215, IEC 61730, conformity to CE




Trust Suntech to Deliver Reliable Performance Over Time

- World-class manufacturer of crystalline silicon photovoltaic modules
- Unrivaled manufacturing capacity and world-class technology
- Rigorous quality control meeting the highest international standards: ISO 9001, ISO 14001 and ISO17025
- Regular independently checked production process from international accredited institute/company
- Long-term reliability tests
- 2 × 100% EL inspection ensuring defect-free modules


Special Cell Design

The unique cell design leads to reduced electrodes resistance and smaller current, thus enables higher fill factor. Meanwhile, it can reduce losses of mismatch and cell wear, and increase total reflection.



5 BB

Industry-leading Warranty based on nominal power

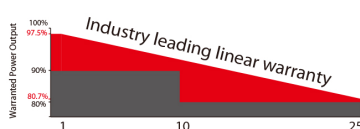

- 97.5% in the first year, thereafter, for years two (2) through twenty-five (25), 0.7% maximum decrease from MODULE's nominal power output per year, ending with the 80.7% in the 25th year after the defined WARRANTY STARTING DATE. ***
- 15-year product warranty
- 25-year linear performance

IP68 Rated Junction Box



The Suntech IP68 rated junction box ensures an outstanding waterproof level, supports installations in all orientations and reduces stress on the cables. High reliable performance, low resistance connectors ensure maximum output for the highest energy production.

* Please refer to Suntech Standard Module Installation Manual for details. **WEEE only for EU market.

*** Please refer to Suntech Product Warranty for details.

Made in China

Electrical Characteristics

STC	STP330S-A60Wfh
Maximum Power at STC (P _{max})	330 W
Optimum Operating Voltage (V _{mp})	34.7 V
Optimum Operating Current (I _{mp})	9.52 A
Open Circuit Voltage (V _{oc})	40.7 V
Short Circuit Current (I _{sc})	10.13 A
Module Efficiency	19.5%
Operating Module Temperature	-40 °C to +85 °C
Maximum System Voltage	1000 V DC (IEC)
Maximum Series Fuse Rating	20 A
Power Tolerance	0/+5 W

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5;
Tolerance of P_{max} is within +/- 3% and tolerances of V_{oc} and I_{sc} are within +/- 5%.

NMOT	STP330S-A60Wfh
Maximum Power at NMOT (P _{max})	248.6 W
Optimum Operating Voltage (V _{mp})	31.9 V
Optimum Operating Current (I _{mp})	7.79 A
Open Circuit Voltage (V _{oc})	38.1 V
Short Circuit Current (I _{sc})	8.18 A

NMOT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s.

Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42 ± 2 °C
Temperature Coefficient of P _{max}	-0.37%/°C
Temperature Coefficient of V _{oc}	-0.304%/°C
Temperature Coefficient of I _{sc}	0.050%/°C


Mechanical Characteristics

Solar Cell	Monocrystalline silicon 158.75 mm
No. of Cells	120 (6 × 20)
Dimensions	1684 × 1002 × 35 mm (66.3 × 39.4 × 1.4 inches)
Weight	19.0 kgs (41.9 lbs.)
Front Glass	3.2 mm (0.13 inches) tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68 rated (3 bypass diodes)
Output Cables	4.0 mm ² (0.006 inches ²), symmetrical lengths (-) 1200 mm (47.2 inches), (+) 1200 mm (47.2 inches)
Connectors	Genuine MC4


Packing Configuration

Container	40' HC
Pieces per pallet	30
Pallets per container	26
Pieces per container	780
Packaging box dimensions	1730 × 1109 × 1140 mm
Packaging box weight	580kg

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

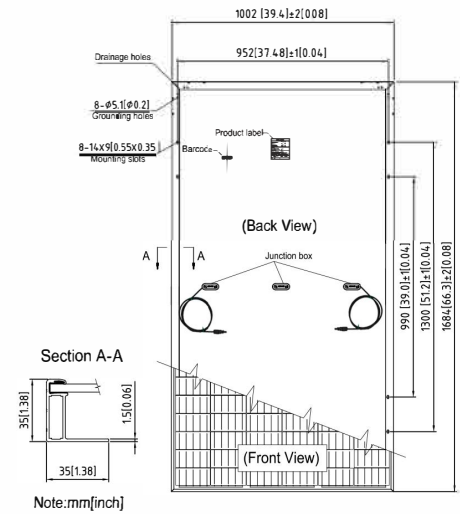

Current-Voltage & Power-Voltage Curve (345S)

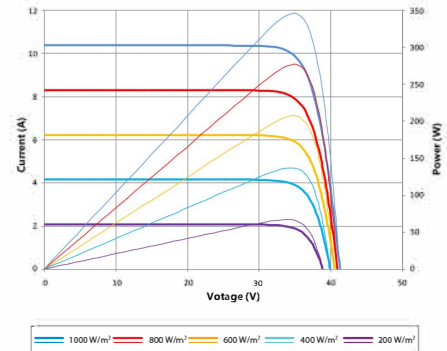

— 1000 W/m² — 800 W/m² — 600 W/m² — 400 W/m² — 200 W/m²

Dealer information

07 3505 3030
orders@solarau.com.au
https://solarau.com.au

solar au Distribution & Supply Chain Solutions